



Twinkly for Business

2021 | PORTFOLIO

LEGEND

Product families



Part of / works with Twinkly PRO product range



Part of / works with Twinkly PLUS product range




Part of / works with Twinkly product range

Compatibilities



Works with Twinkly PRO Power Line Controller



Works with Twinkly PLUS Power Line Controller

LED profiles



RGB — Red, Green, Blue (+16 million colors)

Identified as STP within a product SKU



RGB+W — Red, Green, Blue (+16 million colors) + Warm White

Identified as SPP within a product SKU



AWW — Amber, Warm White, Cold White

Identified as GOP within a product SKU

COMPARISON TABLE

FEATURE	TWINKLY PRO	TWINKLY PLUS	TWINKLY
Multi-view Mapping	✓	✓	✓
Fx Wizard	✓	✓	✓
Group multiple devices	✓	✓	✓
Sync with Music	✓ with Music Player	✓ with Twinkly Music Dongle	✓ with Twinkly Music Dongle
Voice Commands	✗	ON/OFF - Brightness	ON/OFF - Brightness
Import Video	✓ via WebApp	✓ via App	✓ via App
Drone Mapping	✓	✗	✗
Third Party Integration	✓	✗	✗
Cloud Console	✓	✗	✗
Connectivity	Ethernet	Wi-Fi 2.4GHz	Wi-Fi 2.4GHz
IP rating	IP65	IP65	IP44 / IP20
Max LED per Controller	Max 1500 Pro LEDs using 6 ports	Max 500 Pro LEDs (using TWPLUS-SPLITTER-2)	Max 600 LEDs (connected by default)
Max LED support	60.000	Max 5.000 LEDs in a group or 10 devices	Max 6.000 LEDs in a group or 10 devices
App availability	iOS 11 or later	iOS 11 or later	iOS 11 or later Android 6 or later
CyberSecurity	Encrypted Internet communication and restricted user access	Encrypted Internet communication and restricted user access	Encrypted Internet communication and restricted user access

Power Line Controller

Each Power Line Controller can support up to 250 L RGB | RGB+W | AWW per port (1.500 L per Power Line Controller).

IMPROVED CONNECTORS

Now supports RGB+W up to 250 L per each port, up to 6 ports.

CONTROLLER MEASUREMENTS


Length	Width	Height
23.5 cm 9.25 in	10.5 cm 4 in	5 cm 2 in

CABLE MEASUREMENTS

ETH cable length	DC cable length	AC cable length	Ports cable length
1.5 m 5 ft	2 m 6.6 ft	1 m 3.3 ft	20 cm 8 in


TECHNICAL DETAILS

No. of ports	6
Power rating	150W MAX
Adapter input voltage	120 - 240 VAC MAX 50/60 Hz
Temperature range	-15°C / 40°C 5°F / 104°F

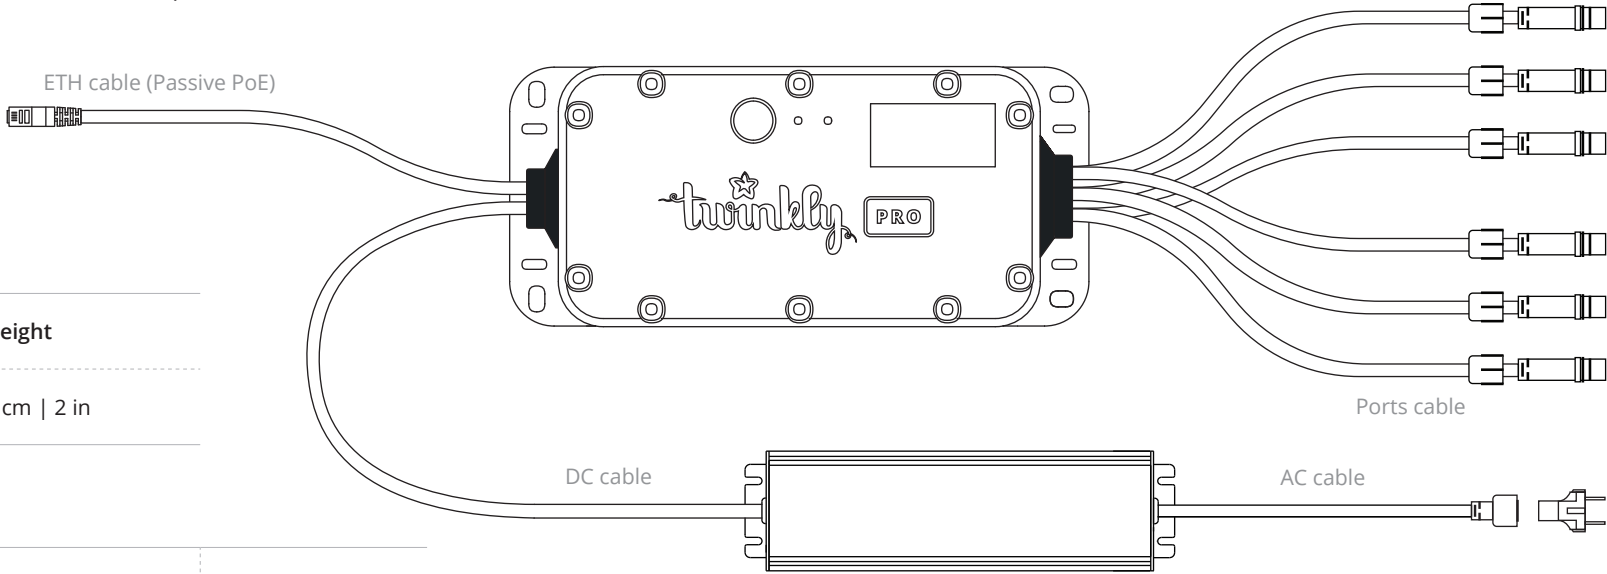


Product SKU	EAN code
TWPRO-CTRL-PLC-21	8056326675851

Connection Hub



Works with Twinkly PRO Power Line Controller

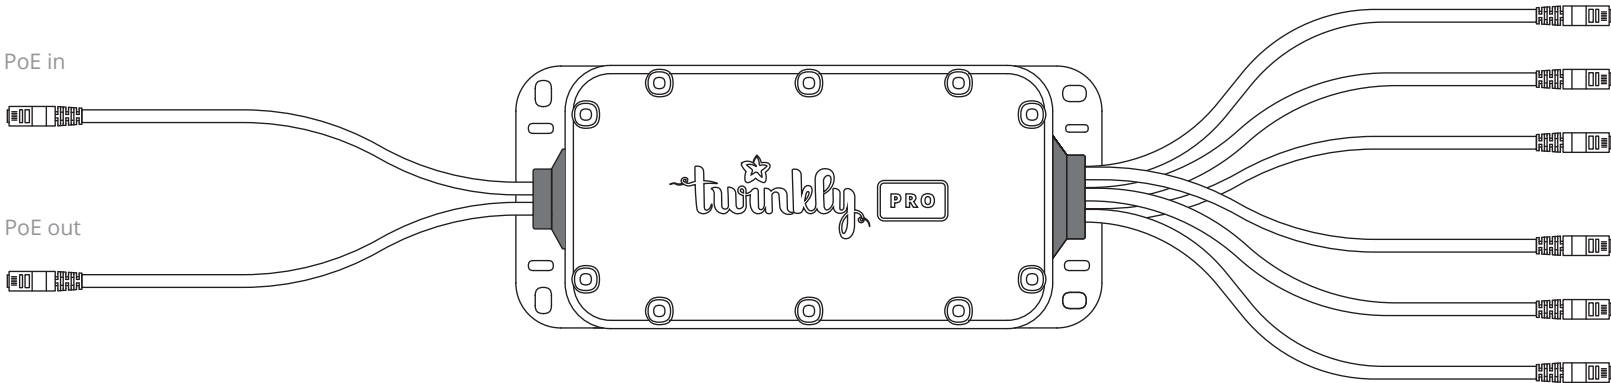

DEVICE MEASUREMENTS

Length	Width	Height
23.5 cm 9.25 in	10.5 cm 4 in	5 cm 2 in

CABLE MEASUREMENTS


PoE cables length	ETH cable length
1.5 m 5 ft	1.5 m 5 ft

TECHNICAL DETAILS


Temperature range	-15°C / 40°C 5°F / 104°F
-------------------	----------------------------

Product SKU	EAN code
TWPRO-HUB-8	8056326675950

4G Router



Works with Twinkly PRO Power Line Controller

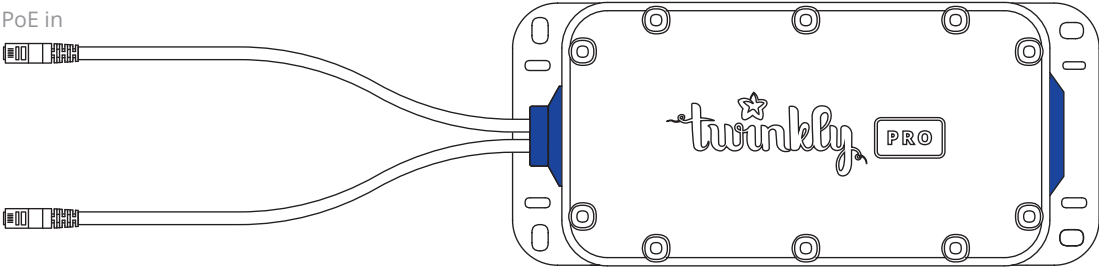

DEVICE MEASUREMENTS

Length	Width	Height
23.5 cm 9.25 in	10.5 cm 4 in	5 cm 2 in

CABLE MEASUREMENTS

ETH cable length
1.5 m 5 ft


TECHNICAL DETAILS

Temperature range	-15°C / 40°C 5°F / 104°F
-------------------	----------------------------


Product SKU	EAN code
TWPRO-4GEU	8056326675967
TWPRO-4GUS	8056326676810

SIM card not included

Music Player



Works with Twinkly PRO Power Line Controller

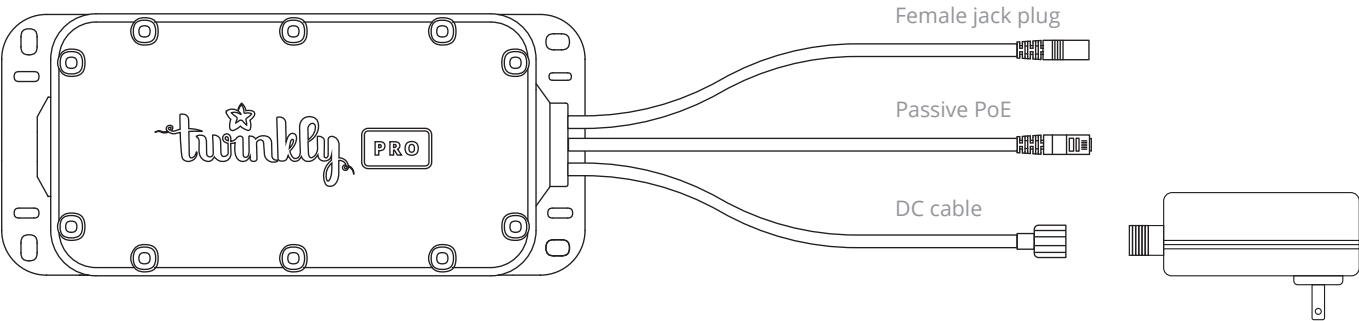

DEVICE MEASUREMENTS

Length	Width	Height
23.5 cm 9.25 in	10.5 cm 4 in	5 cm 2 in

CABLE MEASUREMENTS

Jack cable length	ETH cable length	DC cable length
1 m 3.3 ft	1.5 m 5 ft	1 m 3.3 ft

TECHNICAL DETAILS

Power rating	48W MAX
Adapter input voltage	120 - 240 VAC MAX 50/60 Hz
Temperature range	-15°C / 40°C 5°F / 104°F

Product SKU	EAN code
TWPRO-MUSIC-EU	8056326675974
TWPRO-MUSIC-US	8056326676858
TWPRO-MUSIC-UK	8056326676865
TWPRO-MUSIC-AU	8056326676872

Power Line Controller

Each controller can manage up to 500 L RGB | RGBW | AWW LEDs with the use of Twinkly PRO Port Splitter in two separate lines, and it allows to create groups of lights up to 5.000 L RGB | RGBW | AWW lamps.

CONTROLLER MEASUREMENTS

Length	Width	Height
10.8 cm 4.25 in	3.8 cm 1.5 in	2.3 cm 0.9 in

CABLE MEASUREMENTS


Port cable length	DC cable length	AC cable length
30 cm 12 in	1 m 3.3 ft	1.5 m 5 ft

TECHNICAL DETAILS

No. of ports	1 *
Power rating	48W MAX
Adapter input voltage	120 - 240 VAC MAX 50/60 Hz
Temperature range	-15°C / 40°C 5°F / 104°F

IMPROVED CONNECTORS


Now supports RGB+W up to 500L

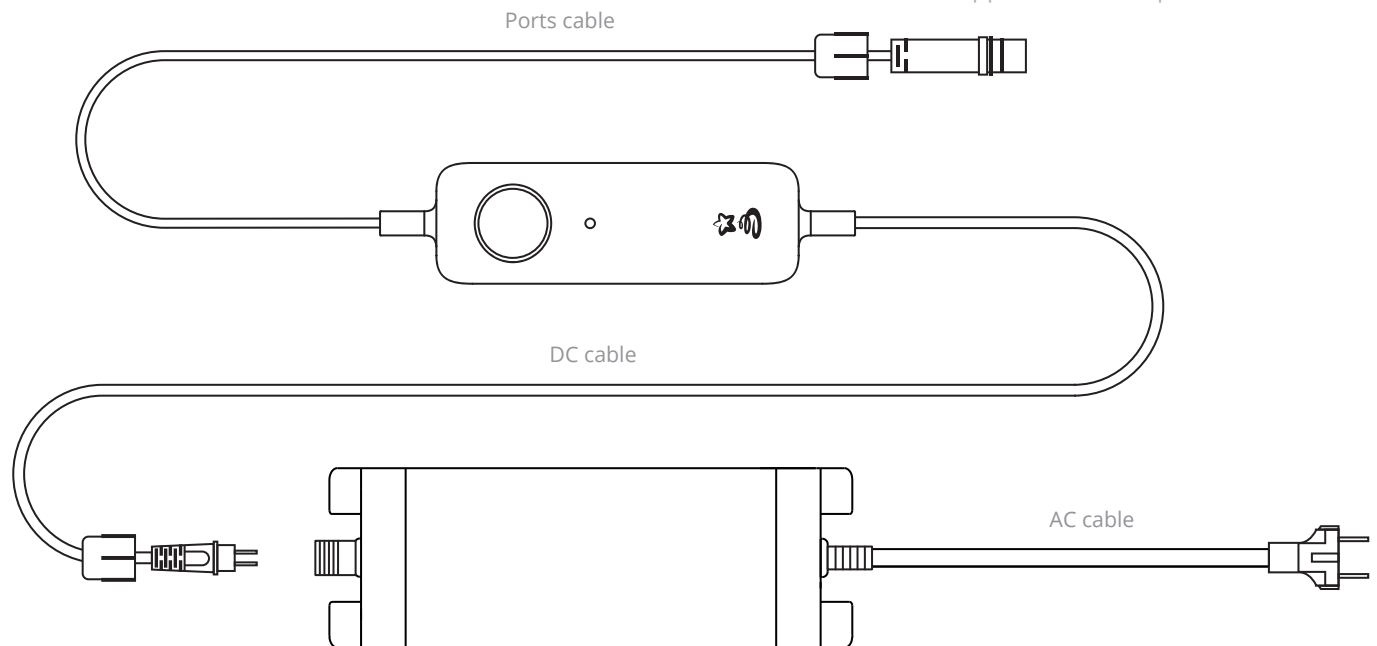


* Extendible to 2 with Twinkly Plus Port Splitter

Product SKU	EAN code
TWPLUS-CTRL-PLC-21EU	8056326675981
TWPLUS-CTRL-PLC-21US	8056326676773
TWPLUS-CTRL-PLC-21UK	8056326676780

Port Splitter



Works with Twinkly PLUS Power Line Controller

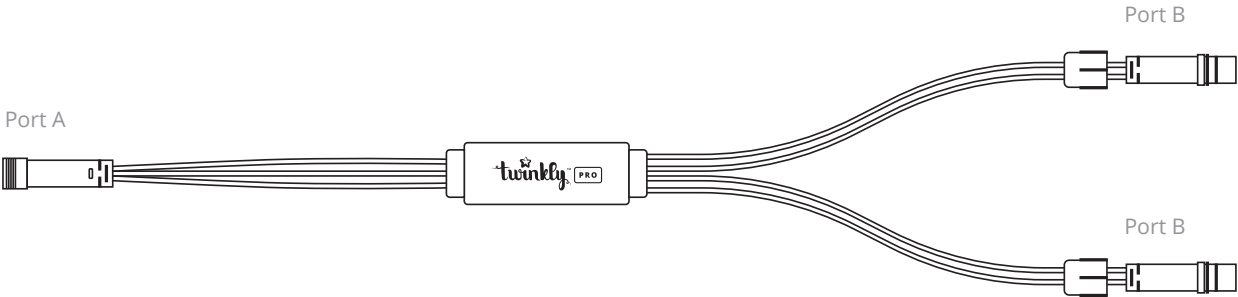

CABLE MEASUREMENTS

Port A cable length	Port B cable length
15 cm 5.9 in	15 cm 5.9 in

Product SKU	EAN code
TWPLUS-SPLITTER-2	8056326676001

TWINKLY PRO


TWINKLY PLUS



Lead Extension Cable



Works with Twinkly PRO Power Line Controller



Works with Twinkly PLUS Power Line Controller

Compatible with

Capsule Single Line Strings - TW-PLC-S-CA-1x250

Capsule Dual Line Strings - TW-PLC-S-CA-2x125

Capsule Icicle - TW-PLC-I-CA-250

Capsule Curtain - TW-PLC-CU-CA-05x50

Capsule Curtain - TW-PLC-CU-CA-10x25

Bulb Strings G45 - TW-PLC-G45-FR-20-STP-B



DETAILS

Cable colors	
Length	5 m 16.4 ft


Product SKU	EAN code
TW-PLC-EXT-B	8056326676018
TW-PLC-EXT-G	8056326676025
TW-PLC-EXT-W	8056326676032
TW-PLC-EXT-T	8056326676049

TWINKLY PRO

TWINKLY PLUS



Capsule Strings

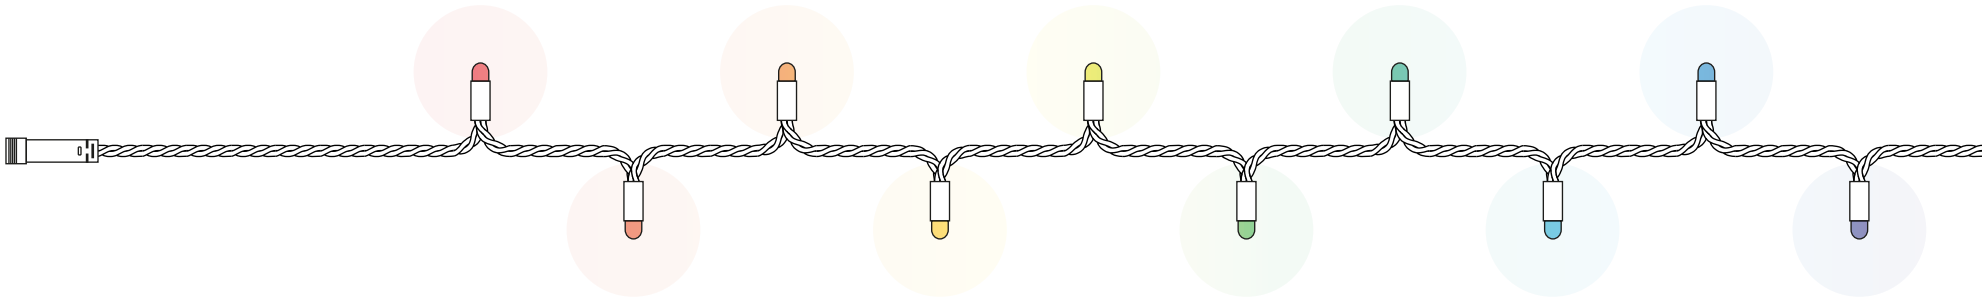

DETAILS

LED profiles	
Cable colors	
No. of lamps	250 1x 250
Lead length	5 m 16.4 ft
Lighted length	25 m 82 ft
Distance between lamps	10 cm 4 in


Product SKU	EAN code	Product SKU	EAN code	Product SKU	EAN code
TW-PLC-S-CA-1x250STP-B	8056326676056	TW-PLC-S-CA-1x250SPP-B	8056326676094	TW-PLC-S-CA-1x250GOP-B	8056326676131
TW-PLC-S-CA-1x250STP-G	8056326676063	TW-PLC-S-CA-1x250SPP-G	8056326676100	TW-PLC-S-CA-1x250GOP-G	8056326676148
TW-PLC-S-CA-1x250STP-W	8056326676070	TW-PLC-S-CA-1x250SPP-W	8056326676117	TW-PLC-S-CA-1x250GOP-W	8056326676155
TW-PLC-S-CA-1x250STP-T	8056326676087	TW-PLC-S-CA-1x250SPP-T	8056326676124	TW-PLC-S-CA-1x250GOP-T	8056326676162

TWINKLY PRO

TWINKLY PLUS

IP65

Capsule Strings

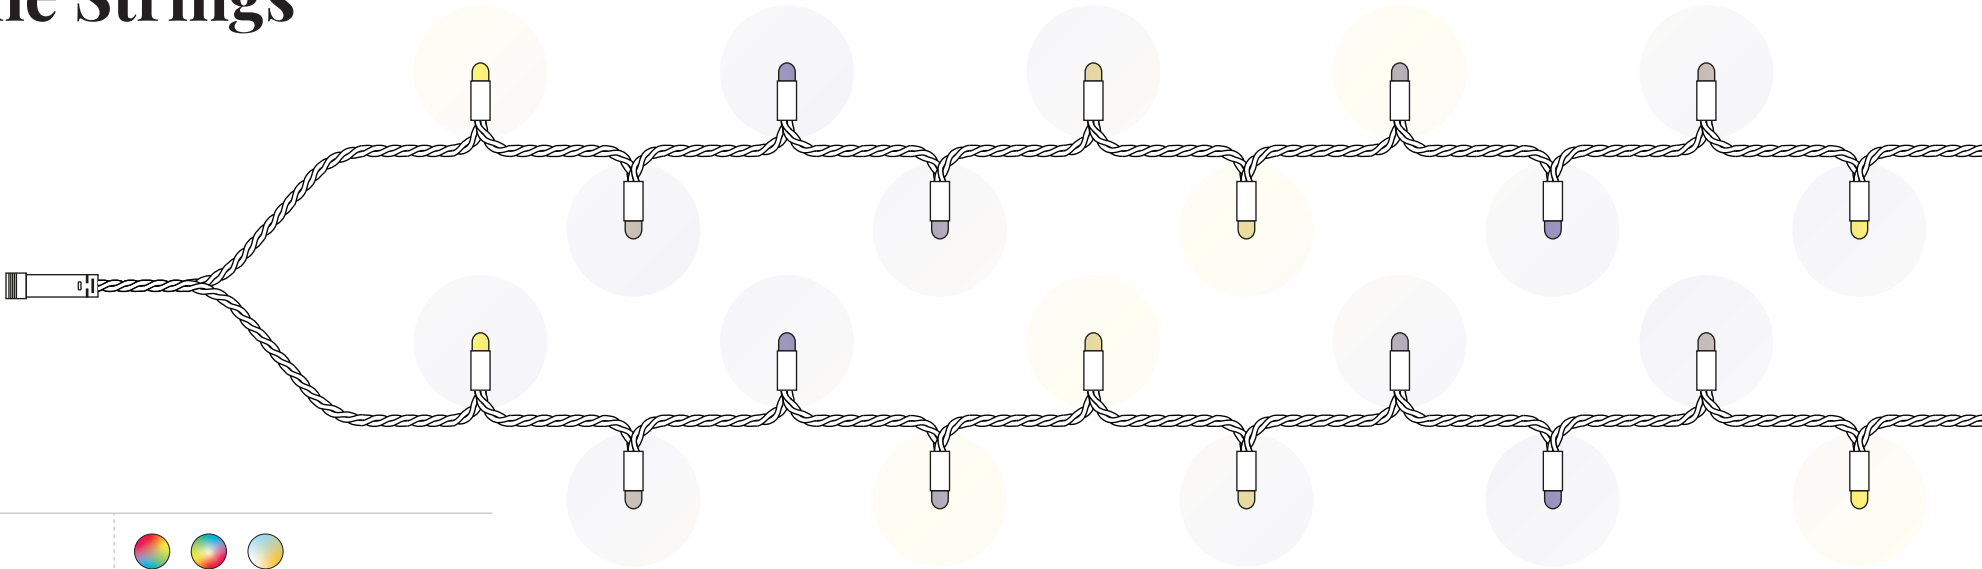

DETAILS

LED profiles	
Cable colors	
No. of lamps	250 2x 125
Lead length	5 m 16.4 ft
Lighted length	12.5 m 41 ft
Distance between lamps	10 cm 4 in


Product SKU	EAN code	Product SKU	EAN code	Product SKU	EAN code
TW-PLC-S-CA-2x125STP-B	8056326676179	TW-PLC-S-CA-2x125SPP-B	8056326676216	TW-PLC-S-CA-2x125GOP-B	8056326676254
TW-PLC-S-CA-2x125STP-G	8056326676186	TW-PLC-S-CA-2x125SPP-G	8056326676223	TW-PLC-S-CA-2x125GOP-G	8056326676261
TW-PLC-S-CA-2x125STP-W	8056326676193	TW-PLC-S-CA-2x125SPP-W	8056326676230	TW-PLC-S-CA-2x125GOP-W	8056326676278
TW-PLC-S-CA-2x125STP-T	8056326676209	TW-PLC-S-CA-2x125SPP-T	8056326676247	TW-PLC-S-CA-2x125GOP-T	8056326676285

Capsule Icicle

DETAILS

LED profiles	
Cable colors	
No. of lamps	250
Drops schema	4-6-8-7
Lead length	5.5 m 18 ft
Lighted length	5 x 0.8 m 16.4 x 2.6 ft
Distance between drops	12.5 cm 5 in
Distance between lamps	10 cm 4 in

Product SKU	EAN code
TW-PLC-I-CA-250STP-T	8056326676711
TW-PLC-I-CA-250STP-W	8056326676728
TW-PLC-I-CA-250SPP-T	8056326676735
TW-PLC-I-CA-250SPP-W	8056326676742
TW-PLC-I-CA-250GOP-T	8056326676759
TW-PLC-I-CA-250GOP-W	8056326676766

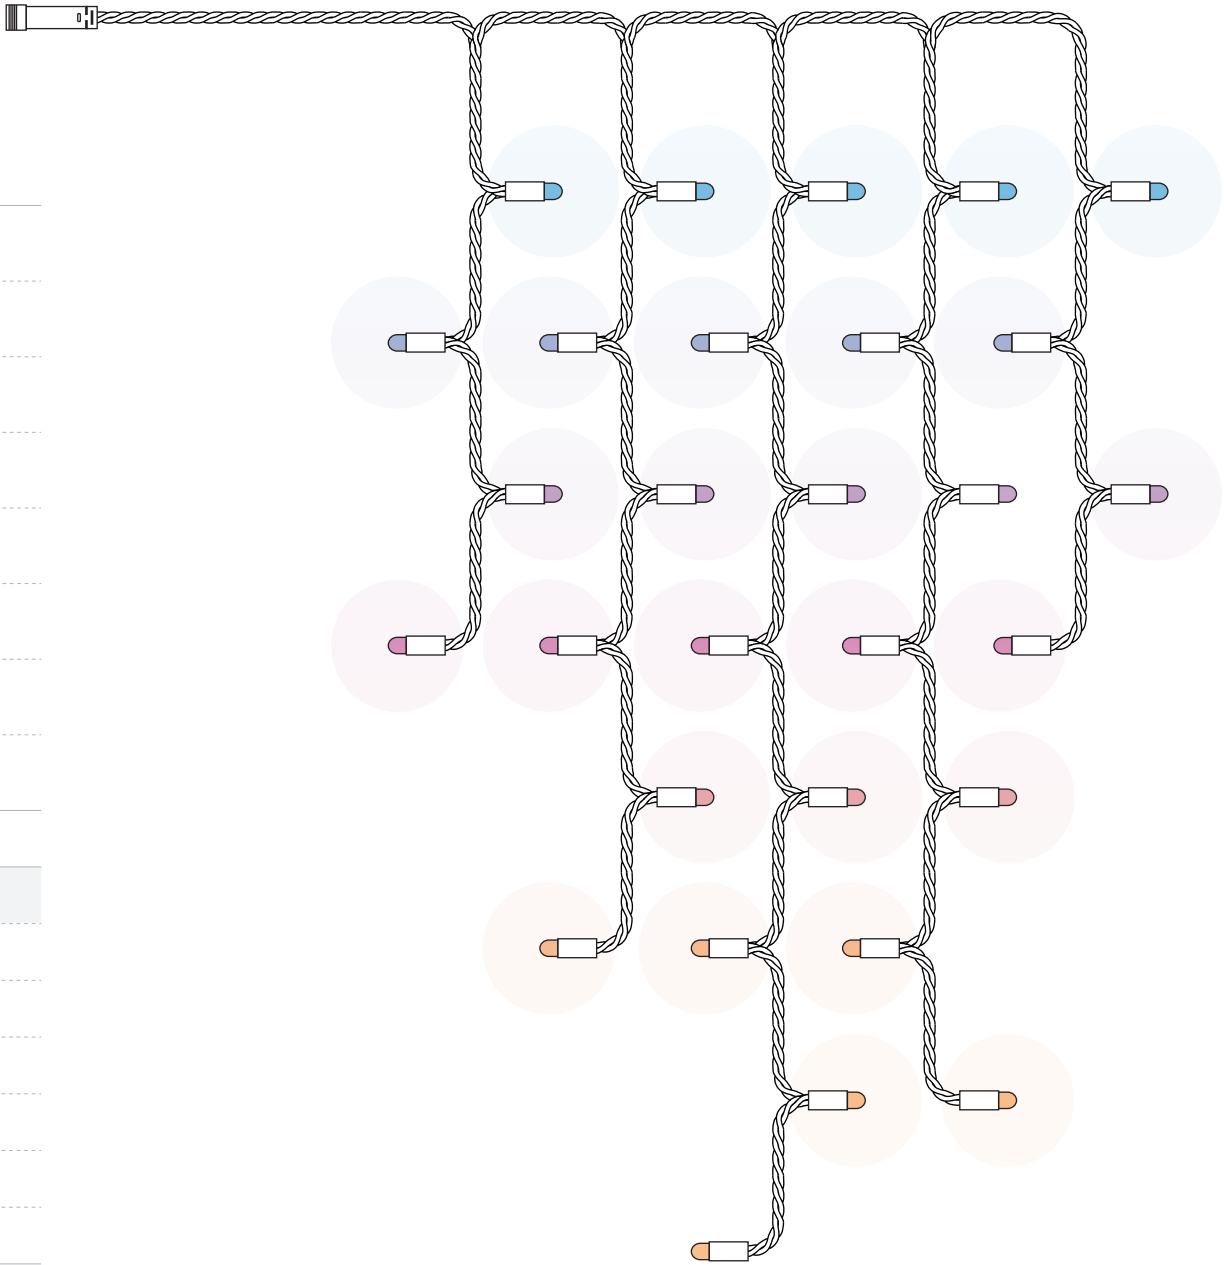

TWINKLY PRO


TWINKLY PLUS

IP65

Capsule Curtain

DETAILS

LED profiles	
Cable colors	
No. of lamps	250 5x 50
Lead length	5 m 16.4 ft
Lighted length	0.5 x 4 m 1.6 x 13.1 ft
Distance between drops	10 cm 4 in
Distance between lamps	8 cm 3.1 in

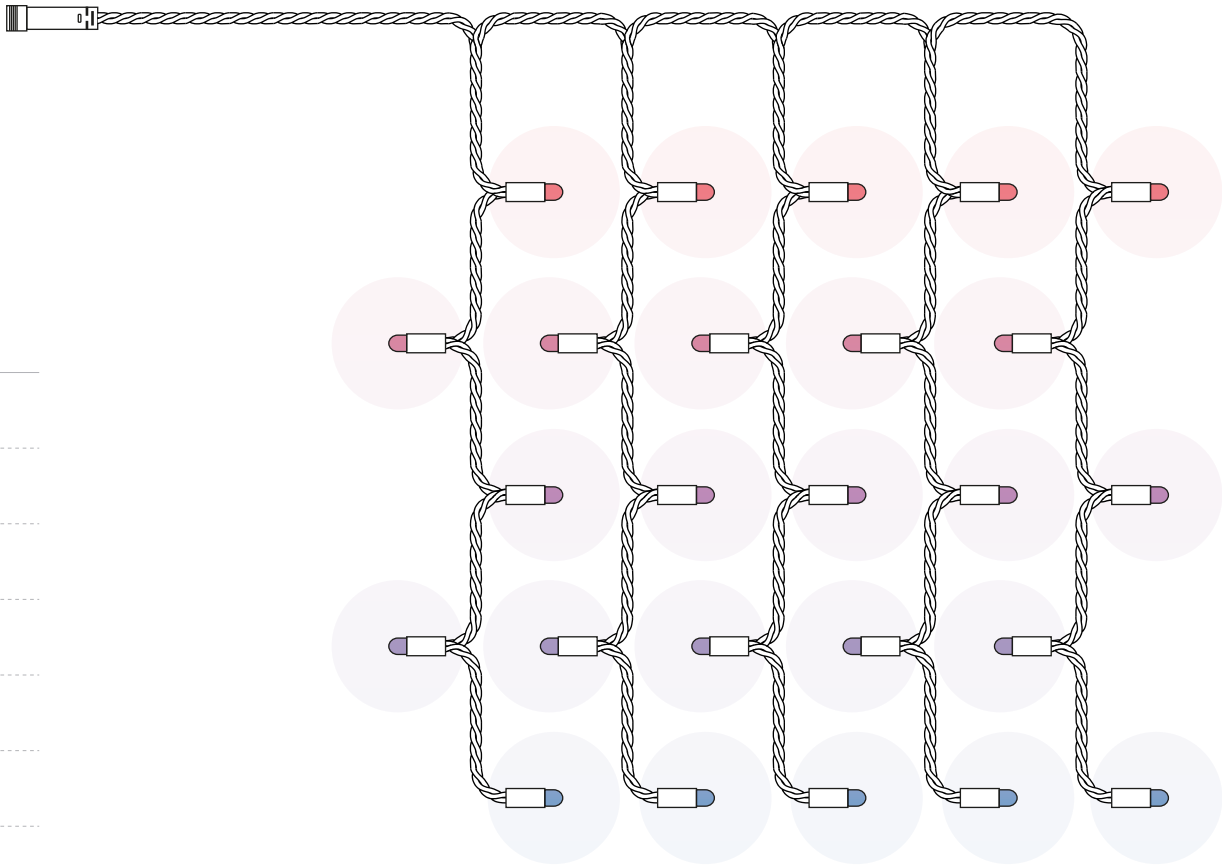


Product SKU	EAN code	Product SKU	EAN code	Product SKU	EAN code
TW-PLC-CU-CA-05x50STP-B	8056326676292	TW-PLC-CU-CA-05x50SPP-B	8056326676339	TW-PLC-CU-CA-05x50GOP-B	8056326676377
TW-PLC-CU-CA-05x50STP-G	8056326676308	TW-PLC-CU-CA-05x50SPP-G	8056326676346	TW-PLC-CU-CA-05x50GOP-G	8056326676384
TW-PLC-CU-CA-05x50STP-W	8056326676315	TW-PLC-CU-CA-05x50SPP-W	8056326676353	TW-PLC-CU-CA-05x50GOP-W	8056326676391
TW-PLC-CU-CA-05x50STP-T	8056326676322	TW-PLC-CU-CA-05x50SPP-T	8056326676360	TW-PLC-CU-CA-05x50GOP-T	8056326676407

TWINKLY PRO

TWINKLY PLUS

IP65

Capsule Curtain

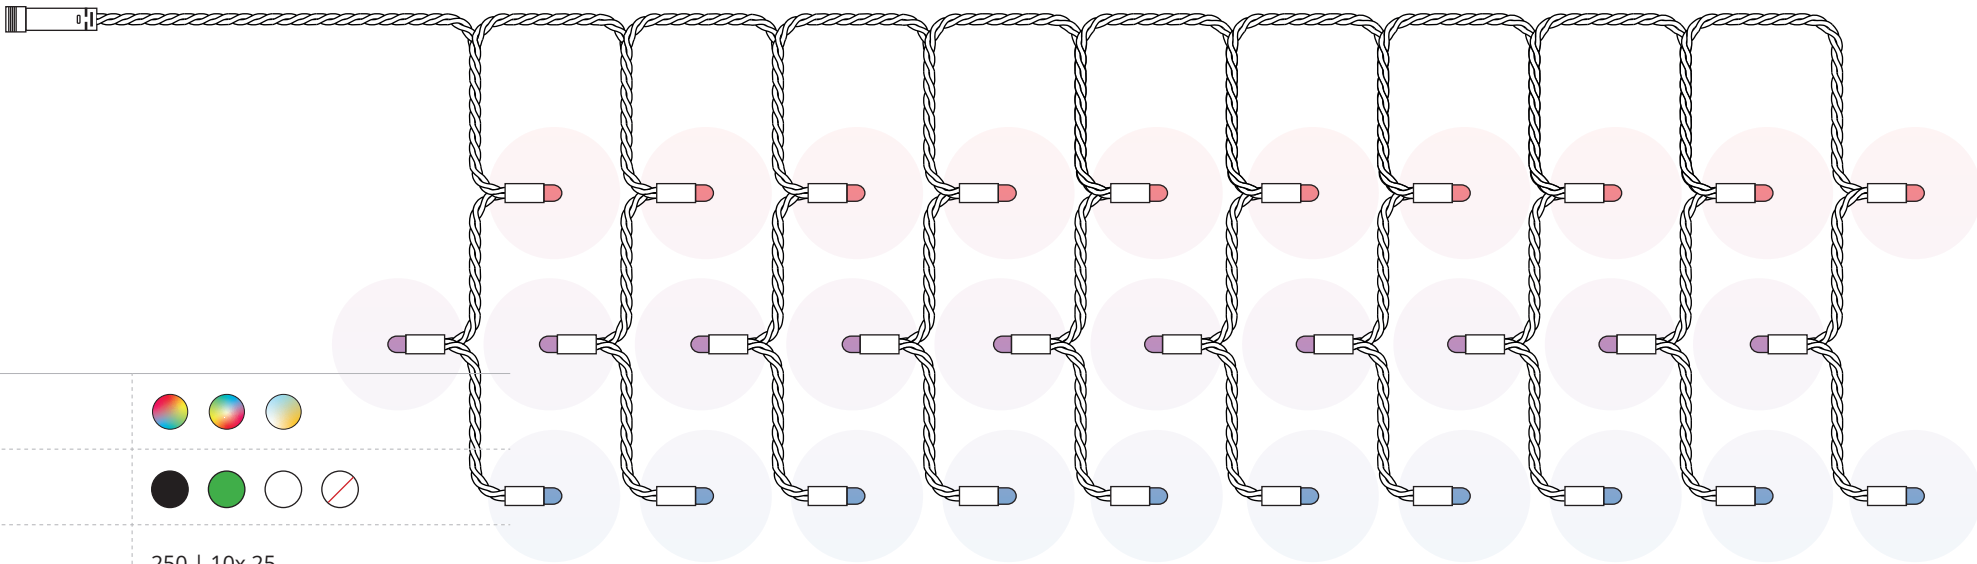

DETAILS	
LED profiles	
Cable colors	
No. of lamps	250 10x 25
Lead length	5 m 16.4 ft
Lighted length	1 x 2 m 3.3 x 6.6 ft
Distance between drops	10 cm 4 in
Distance between lamps	8 cm 3.1 in


Product SKU	EAN code	Product SKU	EAN code	Product SKU	EAN code
TW-PLC-CU-CA-10x25STP-B	8056326676414	TW-PLC-CU-CA-10x25SPP-B	8056326676452	TW-PLC-CU-CA-10x25GOP-B	8056326676490
TW-PLC-CU-CA-10x25STP-G	8056326676421	TW-PLC-CU-CA-10x25SPP-G	8056326676469	TW-PLC-CU-CA-10x25GOP-G	8056326676506
TW-PLC-CU-CA-10x25STP-W	8056326676438	TW-PLC-CU-CA-10x25SPP-W	8056326676476	TW-PLC-CU-CA-10x25GOP-W	8056326676513
TW-PLC-CU-CA-10x25STP-T	8056326676445	TW-PLC-CU-CA-10x25SPP-T	8056326676483	TW-PLC-CU-CA-10x25GOP-T	8056326676520

TWINKLY PRO

TWINKLY PLUS


IP65

G45 Bulb Strings

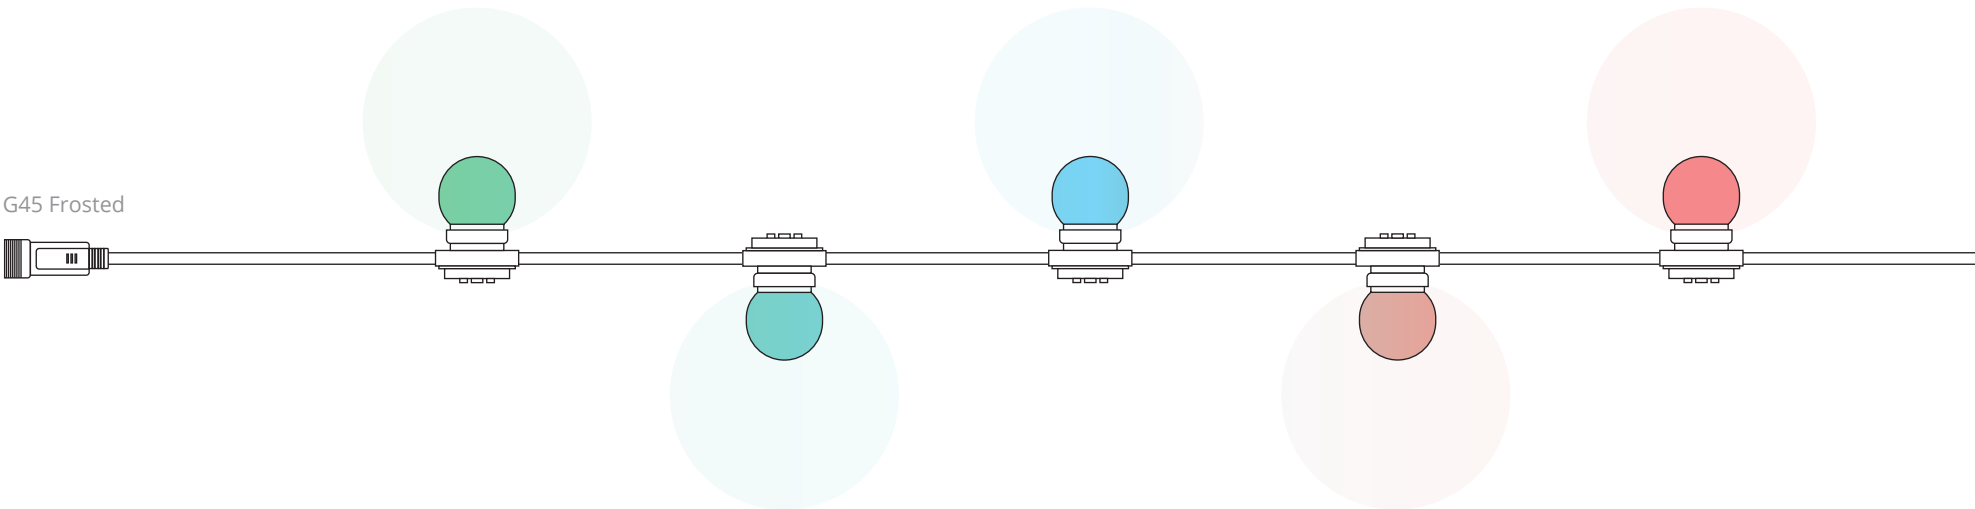

DETAILS	
LED profiles	
Cable colors	
No. of bulbs	20
Lead length	4.5 m 14.8 ft
Lighted length	10 m 32.8 ft
Distance between bulbs	50 cm 19.7 in

G45 to PLC Connector




Product SKU	EAN code
TW-PLC-G45-FR-20-STP-B	8056326676575

Cone Trees

DETAILS

LED profiles	
Cable colors	

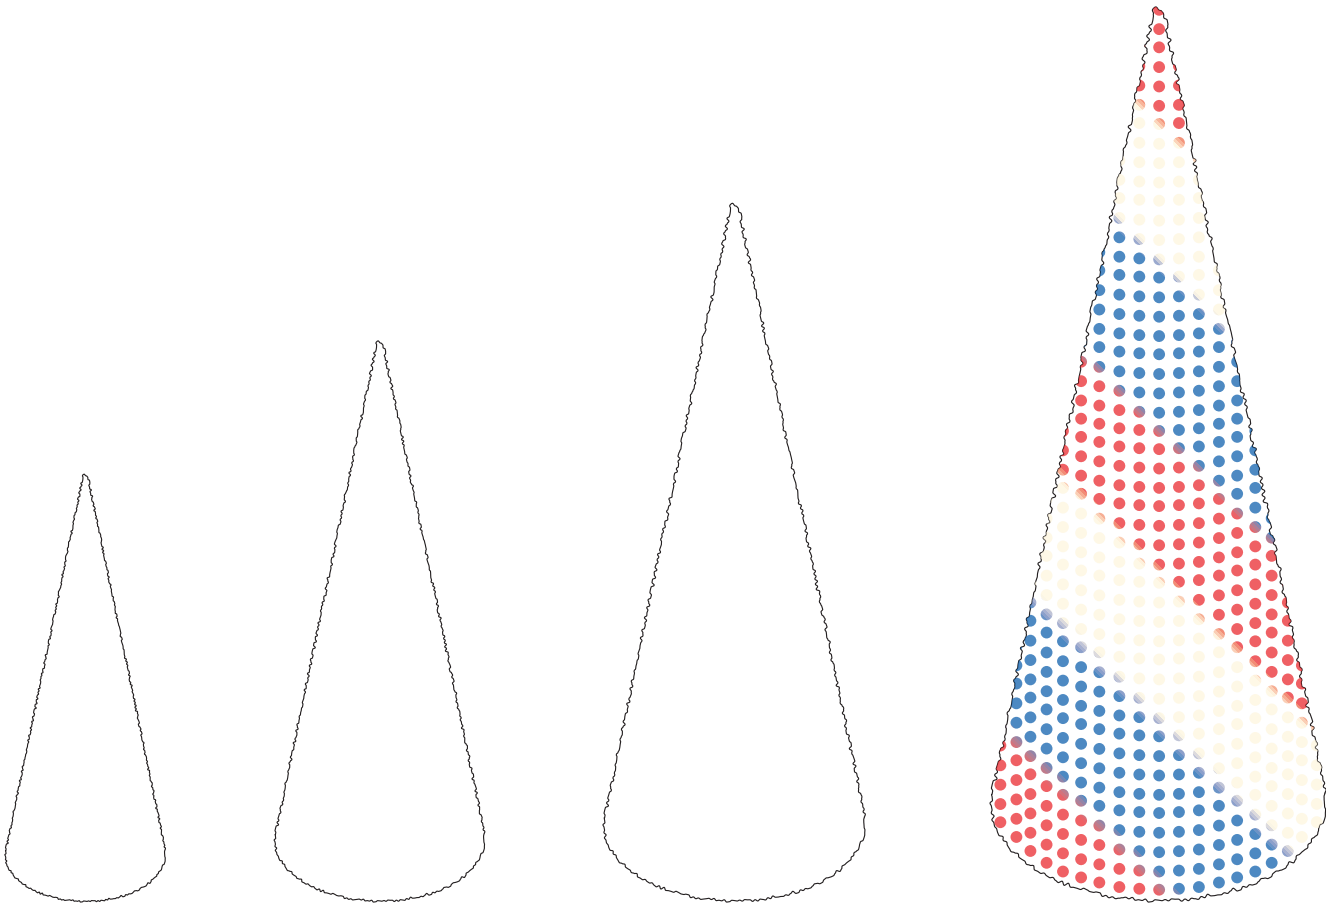

PRODUCT RANGE


No. of lamps	Height	Diameter	Weight	No. of frames
3000	4 m 13.1 ft	1.5 m 5 ft	90 kg 198 lb	2
9000	6 m 19.7 ft	2.15 m 7 ft	170 kg 375 lb	4
24000	10 m 32.8 ft	3.6 m 11.8 ft	880 kg 1940 lb	18
34500	12 m 39.4 ft	4.2 m 13.8 ft	1290 kg 2844 lb	26
54000	16 m 52.5 ft	5.5 m 18 ft	2000 kg 4409 lb	42

Product SKU	EAN code
TWP-S-CA-4mx3k-STP-G	8056326673970
TWP-S-CA-6mx9k-STP-G	8056326673987
TWP-S-CA-10mx24k-STP-G	8056326673994
TWP-S-CA-12mx34k-STP-G	8056326674007
TWP-S-CA-16mx54k-STP-G	8056326674014

TWINKLY



Strings

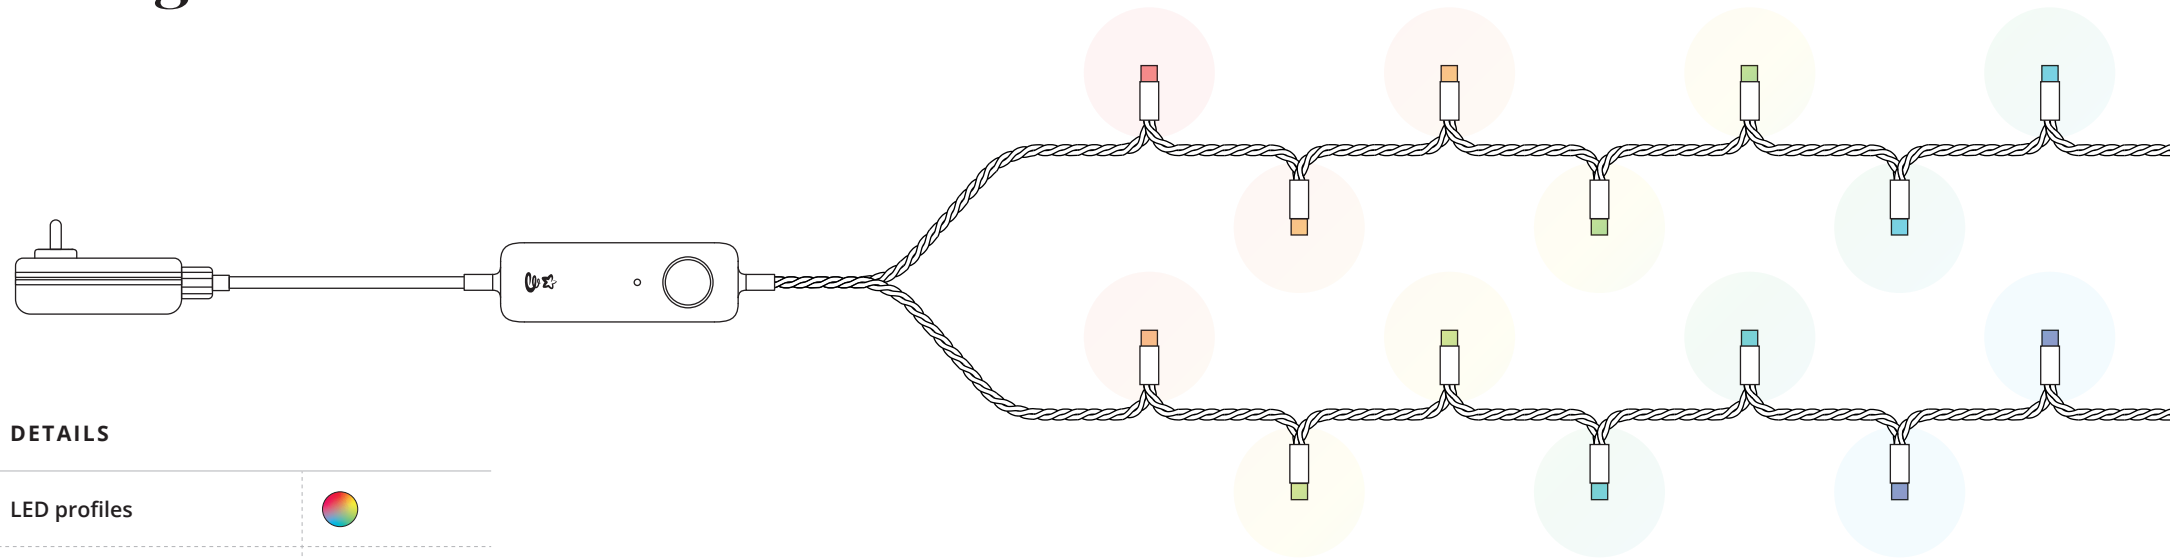

DETAILS

LED profiles	
Connectivity	
Lead length	2.5 m 8.2 ft
Distance between lamps	8 cm 3.1 in

PRODUCT RANGE

No. of lamps	Lighted length	Cable colors	Power rating
100	8 m 26 ft		24W MAX
250	20 m 66 ft		24W MAX
400	32 m 105 ft		36W MAX
600	48 m 157 ft		36W MAX


Product SKU	EAN code	Product SKU	EAN code	Product SKU	EAN code
TWS100STP-BEU	8056326673284	TWS250STP-BUS	8056326671303	TWS400STP-BAU	8056326671358
TWS100STP-BUK	8056326673307	TWS250STP-GUS	8056326673123	TWS400STP-BCH	8056326672348
TWS100STP-BUS	8056326673314	TWS250STP-BAU	8056326671310	TWS600STP-BEU	8056326672737
TWS100STP-GUS	8056326673321	TWS250STP-BCH	8056326672331	TWS600STP-BUK	8056326672744
TWS100STP-BAU	8056326673338	TWS400STP-BEU	8056326671327	TWS600STP-BUS	8056326672751
TWS100STP-BCH	8056326673291	TWS400STP-BUK	8056326671334	TWS600STP-GUS	8056326673147
TWS250STP-BEU	8056326671280	TWS400STP-BUS	8056326671341	TWS600STP-BAU	8056326672768
TWS250STP-BUK	8056326671297	TWS400STP-GUS	8056326673130	TWS600STP-BCH	8056326673093

TWINKLY

IP44

Strings

SPECIAL EDITION

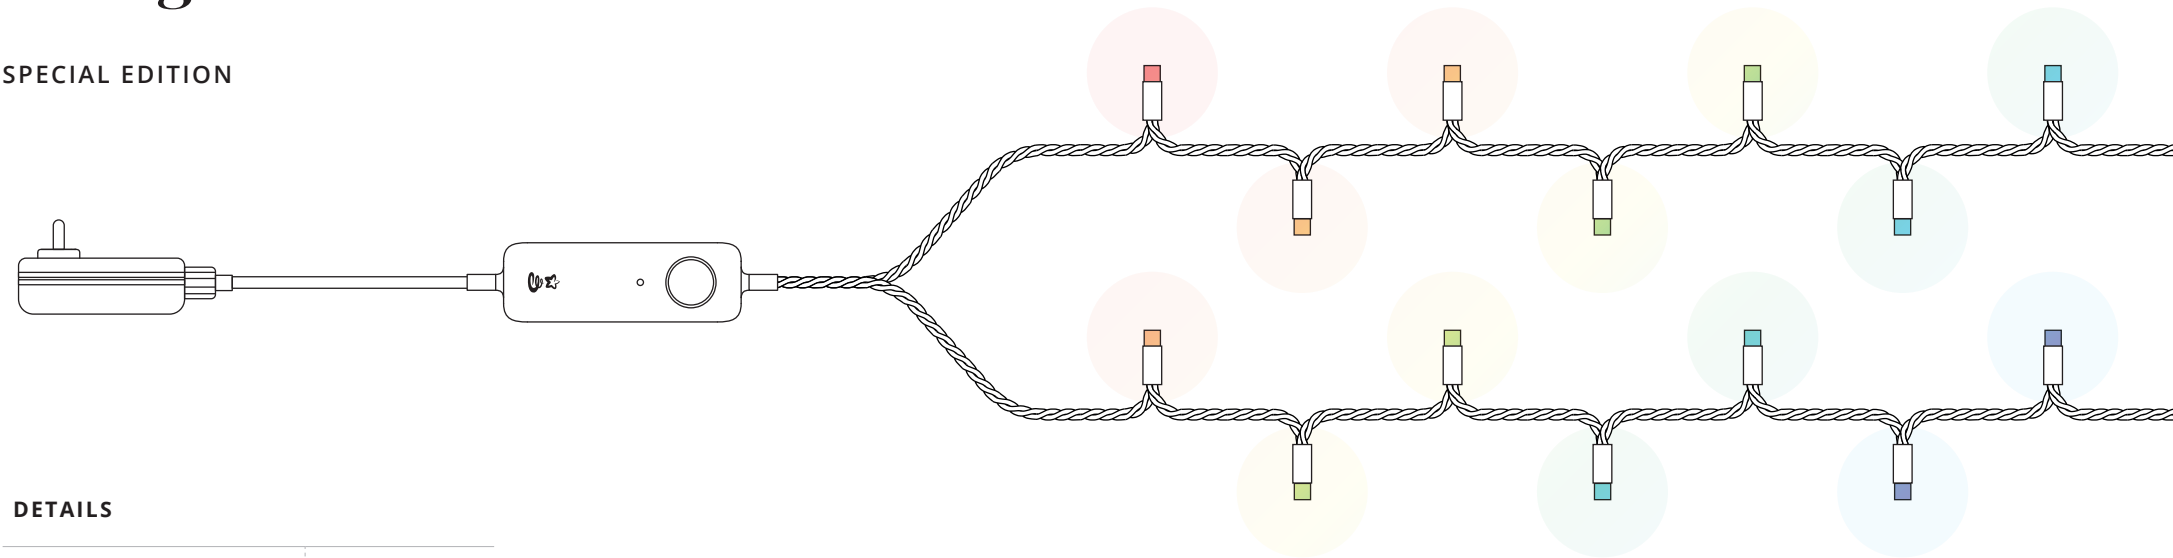

DETAILS

LED profiles	
Connectivity	 
Lead length	2.5 m 8.2 ft
Distance between lamps	8 cm 3.1 in


PRODUCT RANGE

No. of lamps	Lighted length	Cable colors	Power rating
250	20 m 66 ft	 	36W MAX
250	20 m 66 ft		36W MAX
400	32 m 105 ft	 	36W MAX

Product SKU	EAN code	Product SKU	EAN code	Product SKU	EAN code
TWS250SPP-BEU	8056326671365	TWS250SPP-TEU	8056326671723	TWS400SPP-BEU	8056326673390
TWS250SPP-BUK	8056326671372	TWS250SPP-TUK	8056326671730	TWS400SPP-BUK	8056326673413
TWS250SPP-BUS	8056326671389	TWS250SPP-TUS	8056326671747	TWS400SPP-BUS	8056326673420
TWS250SPP-GUS	8056326673154	TWS250SPP-TAU	8056326671754	TWS400SPP-GUS	8056326673437
TWS250SPP-BAU	8056326671396	TWS250SPP-TCH	8056326672713	TWS400SPP-BAU	8056326673444
TWS250SPP-BCH	8056326672355			TWS400SPP-BCH	8056326672355

Strings

GOLD EDITION

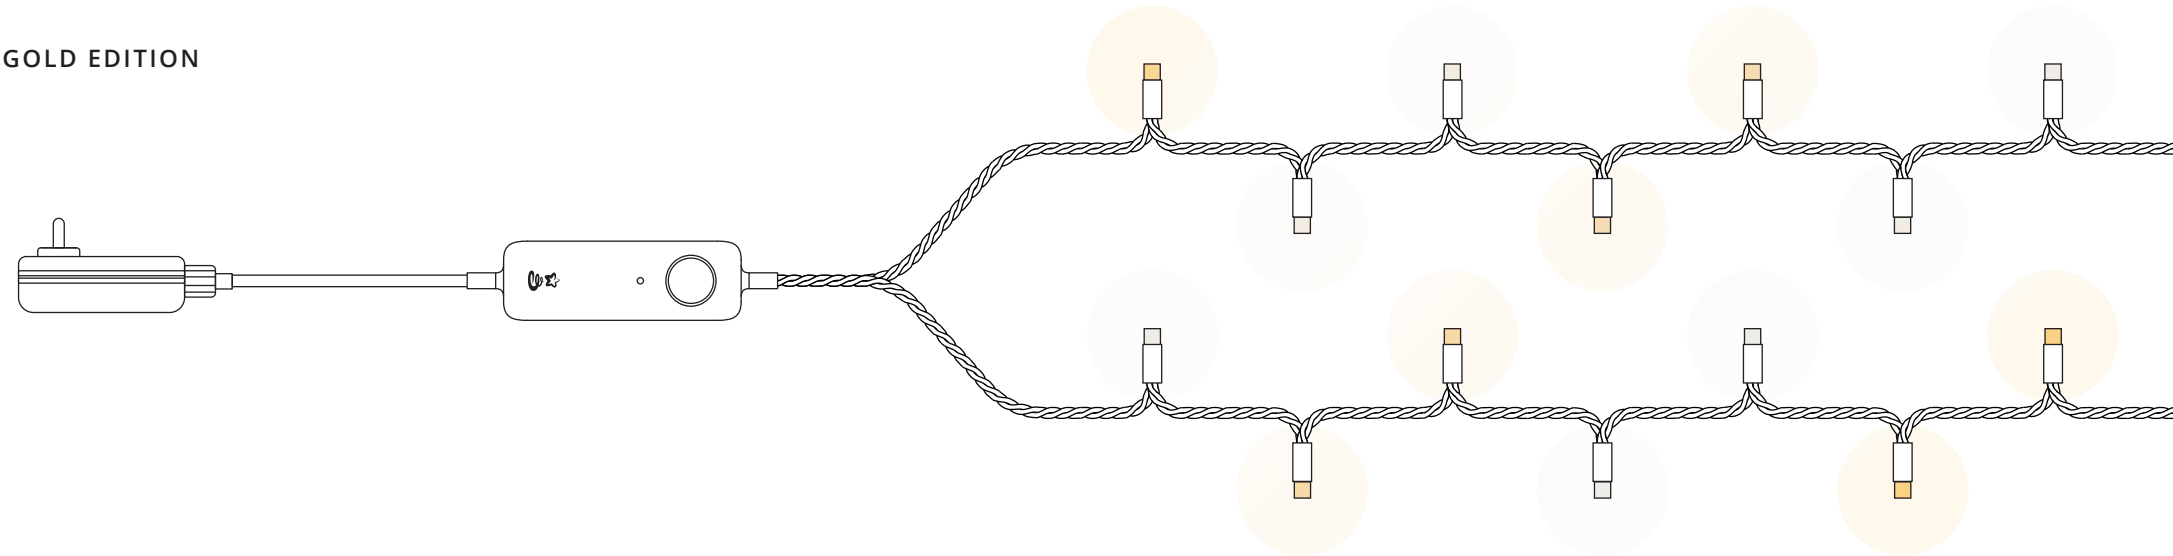

DETAILS

LED profiles	
Connectivity	 
Lead length	2.5 m 8.2 ft
Distance between lamps	8 cm 3.1 in

PRODUCT RANGE


No. of lamps	Lighted length	Cable colors	Power rating
250	20 m 66 ft	 	24W MAX
400	32 m 105 ft	 	36W MAX

Product SKU	EAN code	Product SKU	EAN code
TWS250GOP-BEU	8056326671402	TWS400GOP-BEU	8056326672782
TWS250GOP-BUK	8056326671419	TWS400GOP-BUK	8056326672812
TWS250GOP-BUS	8056326671426	TWS400GOP-BUS	8056326672829
TWS250GOP-GUS	8056326673161	TWS400GOP-GUS	8056326673178
TWS250GOP-BAU	8056326671433	TWS400GOP-BAU	8056326672836
TWS250GOP-BCH	8056326672362	TWS400GOP-BCH	8056326673086

TWINKLY



Icicle

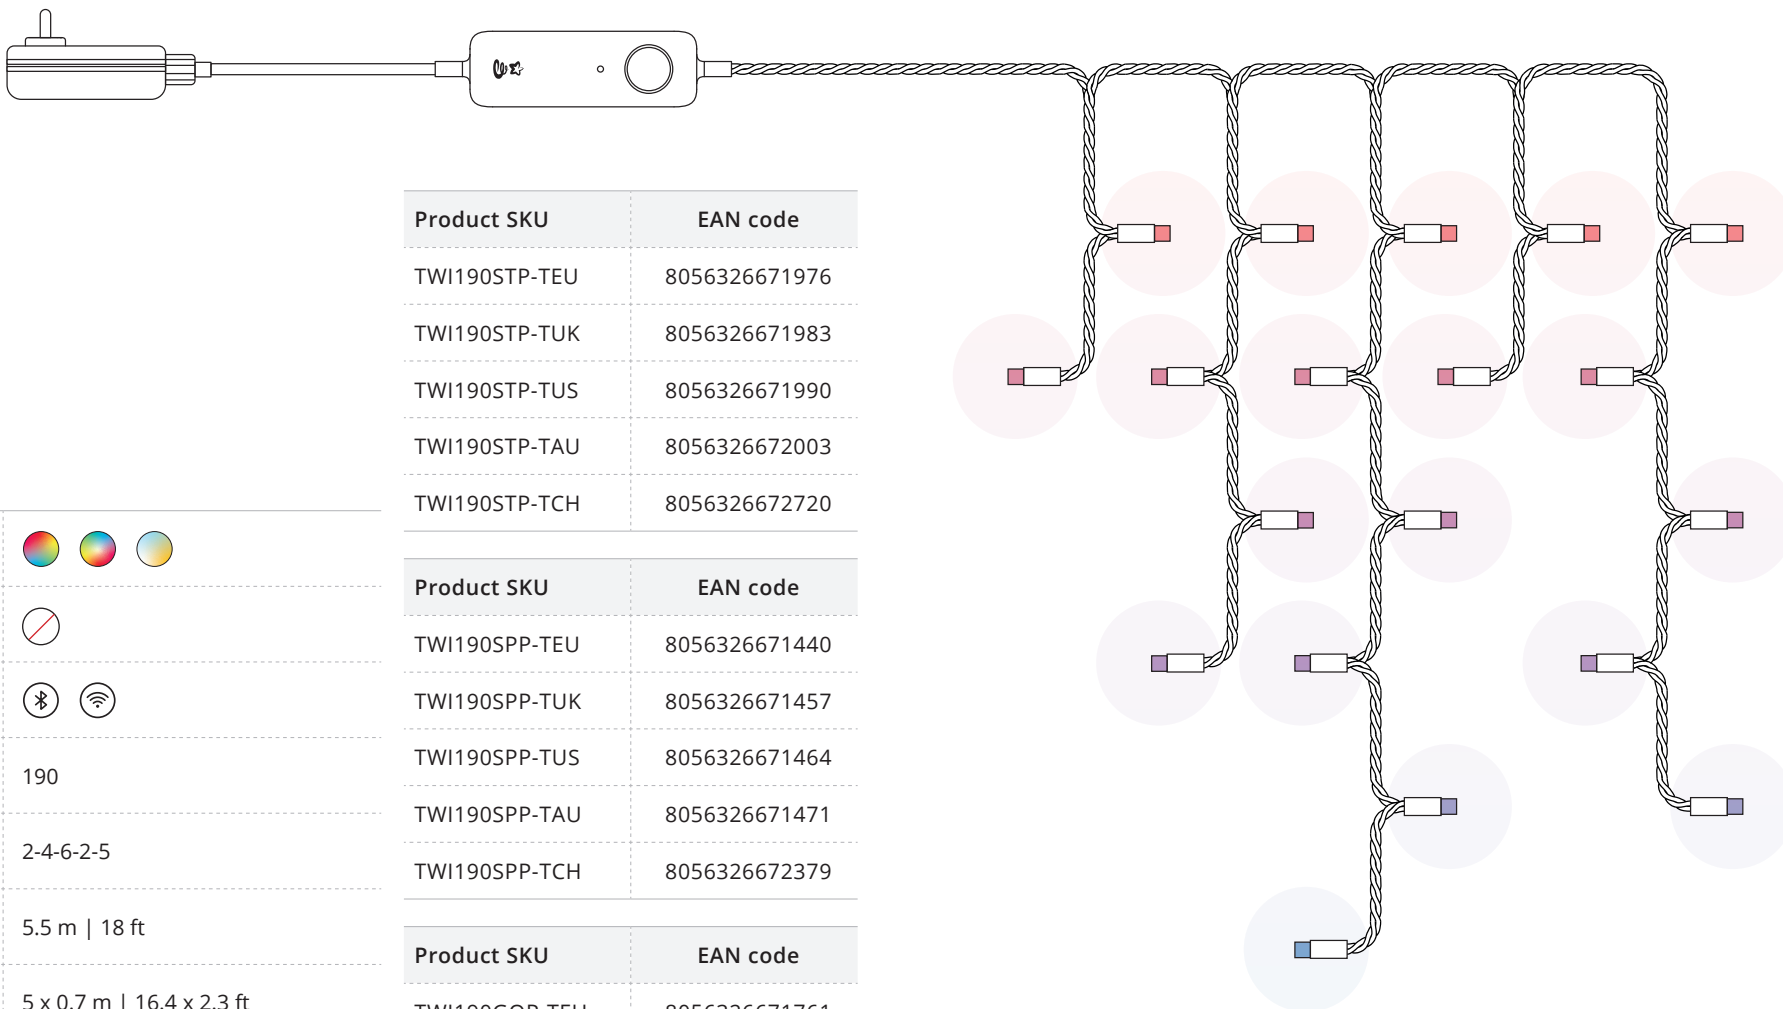

DETAILS

LED profiles	
Cable colors	
Connectivity	
No. of lamps	190
Drops schema	2-4-6-2-5
Lead length	5.5 m 18 ft
Lighted length	5 x 0.7 m 16.4 x 2.3 ft
Distance between drops	10 cm 4 in
Distance between lamps	10 cm 4 in
Power rating	24W MAX

Product SKU	EAN code
TWI190STP-TEU	8056326671976
TWI190STP-TUK	8056326671983
TWI190STP-TUS	8056326671990
TWI190STP-TAU	8056326672003
TWI190STP-TCH	8056326672720


Product SKU	EAN code
TWI190SPP-TEU	8056326671440
TWI190SPP-TUK	8056326671457
TWI190SPP-TUS	8056326671464
TWI190SPP-TAU	8056326671471
TWI190SPP-TCH	8056326672379

Product SKU	EAN code
TWI190GOP-TEU	8056326671761
TWI190GOP-TUK	8056326671778
TWI190GOP-TUS	8056326671785
TWI190GOP-TAU	8056326671792
TWI190GOP-TCH	8056326672386

TWINKLY



Curtain

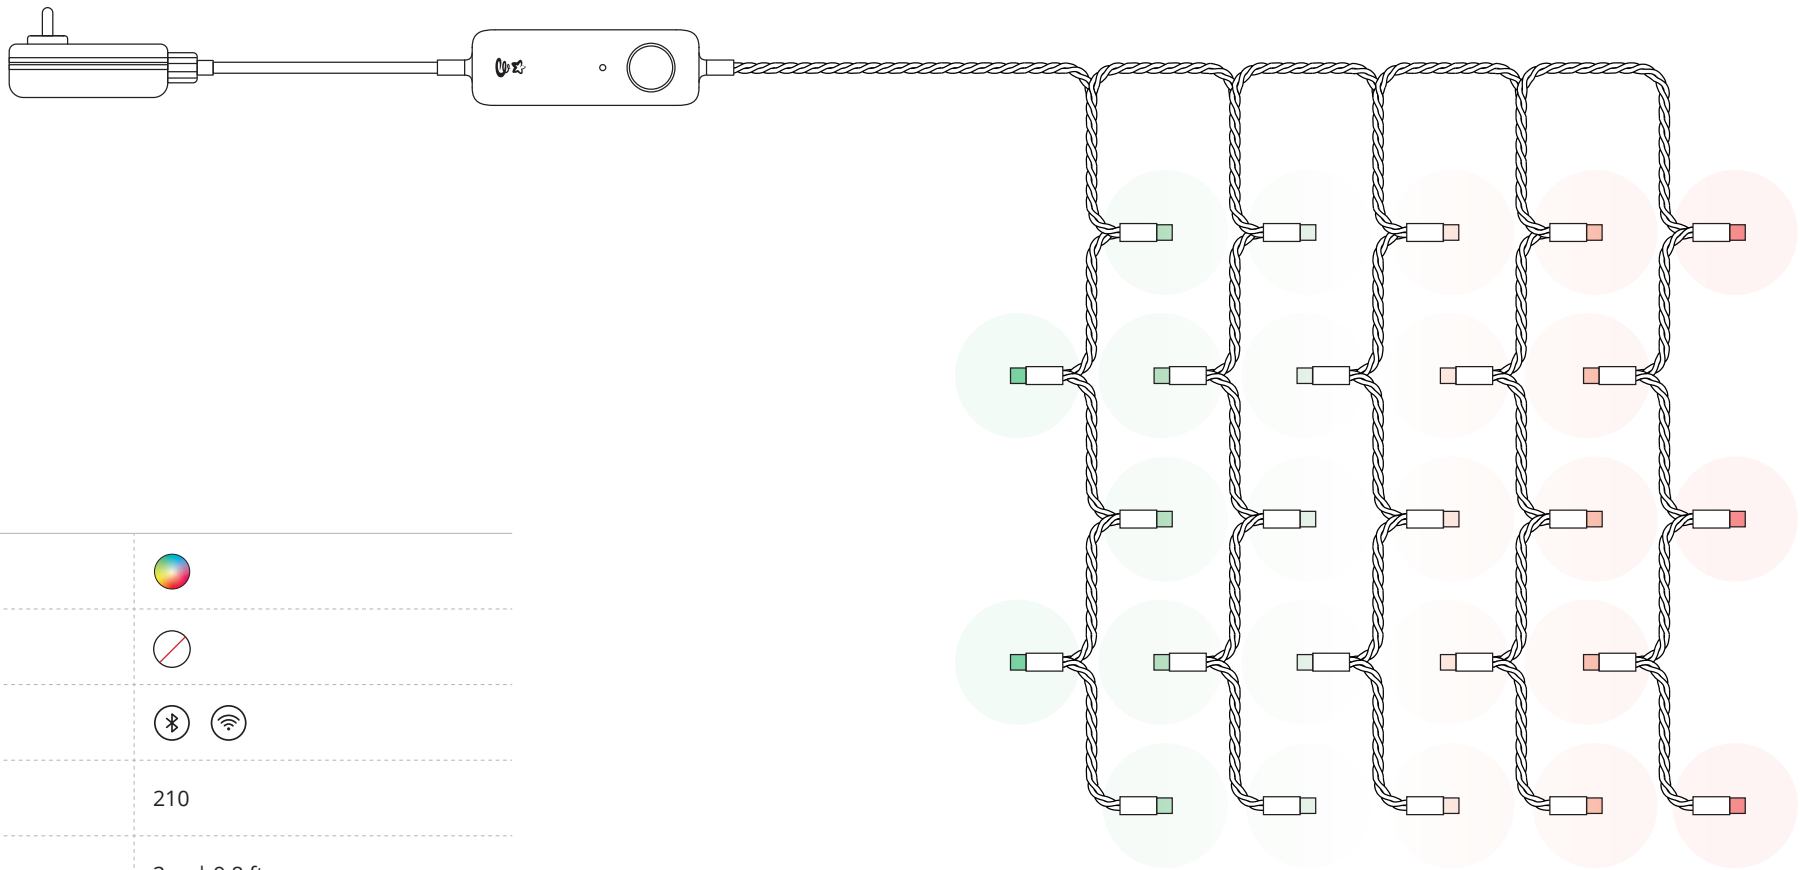

DETAILS


LED profiles	
Cable colors	
Connectivity	
No. of lamps	210
Lead length	3 m 9.8 ft
Lighted length	1.5 x 2.1 m 5 x 6.9 ft
Distance between drops	15 cm 5.9 in
Distance between lamps	10 cm 4 in
Power rating	36W MAX

Product SKU	EAN code
TWW210SPP-TEU	8056326672881
TWW210SPP-TUK	8056326672898
TWW210SPP-TUS	8056326672904
TWW210SPP-TAU	8056326672911
TWW210SPP-TCH	8056326673079

TWINKLY



Cluster

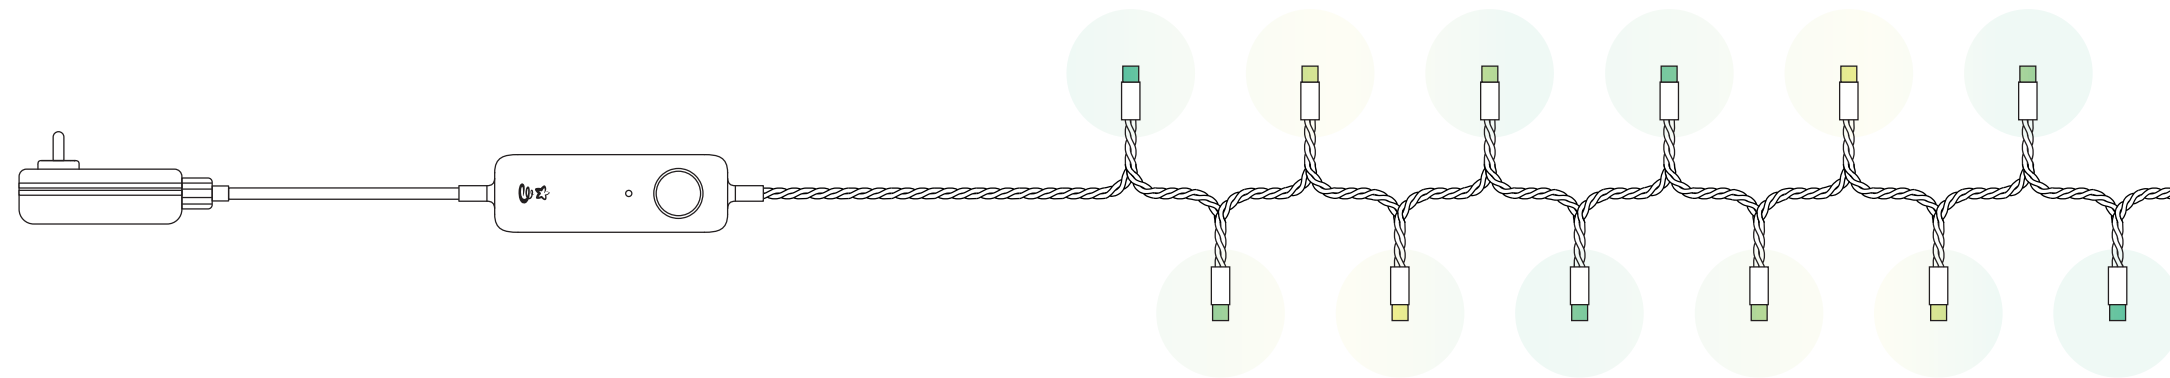

DETAILS


LED profiles	 
Cable colors	 
Connectivity	 
No. of lamps	400
Lead length	2.5 m 8.2 ft
Lighted length	6 m 19.7 ft
Distance between lamps	1.5 cm 0.6 in
Power rating	36W MAX

Product SKU	EAN code	Product SKU	EAN code
TWC400STP-BEU	8056326672799	TWC400GOP-BEU	8056326672805
TWC400STP-BUK	8056326672973	TWC400GOP-BUK	8056326673000
TWC400STP-BUS	8056326672980	TWC400GOP-BUS	8056326673017
TWC400STP-GUS	8056326673185	TWC400GOP-GUS	8056326673192
TWC400STP-BAU	8056326672997	TWC400GOP-BAU	8056326673024
TWC400STP-BCH	8056326673048	TWC400GOP-BCH	8056326673055

TWINKLY



Festoon

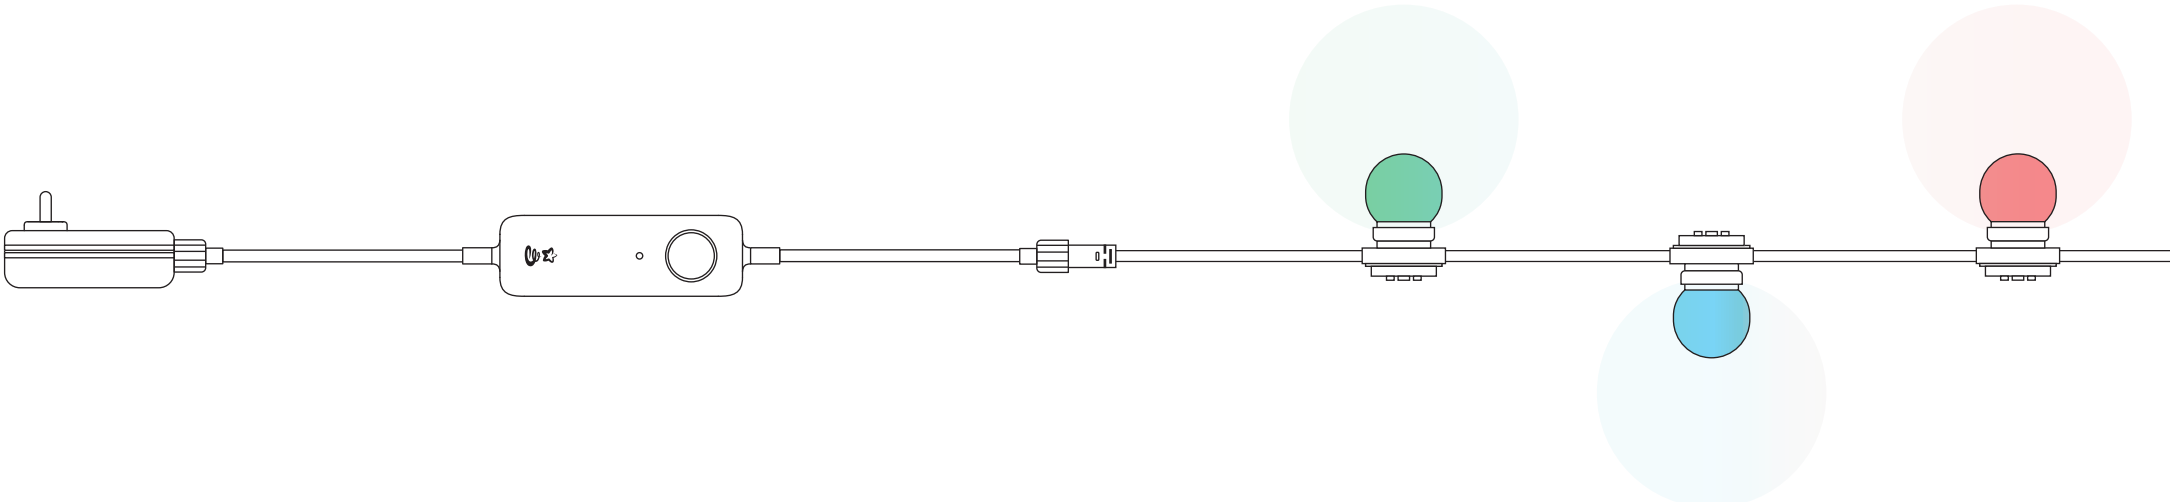

DETAILS

LED profiles	
Cable colors	
Connectivity	 
No. of bulbs	20
Lead length	3 m 9.8 ft
Lighted length	10 m 32.8 ft
Distance between bulbs	50 cm 19.7 in
Power rating	24W MAX

Product SKU	EAN code
TWF020STP-BEU	8056326671563
TWF020STP-BUK	8056326671570
TWF020STP-BUS	8056326671587
TWF020STP-BAU	8056326671594
TWF020STP-BCH	8056326673109


TWINKLY



Pre-lit Tree

PRODUCT RANGE

No. of lamps	LED profiles	Cable color	Height	Diameter	Power rating
250			1.5 m 5 ft	91 cm 36 in	24W MAX
400			1.8 m 6 ft	107 cm 42 in	36W MAX
400			2.3 m 7.5 ft	132 cm 52 in	36W MAX
500			2.3 m 7.5 ft	132 cm 52 in	36W MAX

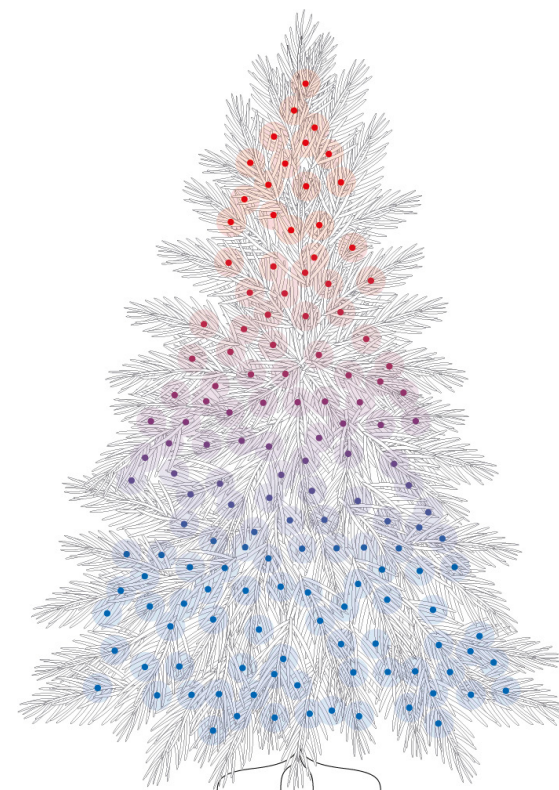

Product SKU	EAN code	Product SKU	EAN code	Product SKU	EAN code	Product SKU	EAN code
TWT250STP-BEU	8056326673604	TWT250GOP-BCH	8056326673666	TWT400SPP-BAU	8056326673741	TWT500STP-BUS	8056326673376
TWT250STP-BUK	8056326673628	TWT400STP-BEU	8056326673505	TWT400SPP-BCH	8056326673710	TWT500STP-BAU	8056326673383
TWT250STP-BUS	8056326673635	TWT400STP-BUK	8056326673529	TWT400GOP-BEU	8056326673550	TWT500STP-BCH	8056326673352
TWT250STP-BAU	8056326673642	TWT400STP-BUS	8056326673536	TWT400GOP-BUK	8056326673574	TWT500GOP-BEU	8056326673451
TWT250STP-BCH	8056326673611	TWT400STP-BAU	8056326673543	TWT400GOP-BUS	8056326673581	TWT500GOP-BUK	8056326673475
TWT250GOP-BEU	8056326673659	TWT400STP-BCH	8056326673512	TWT400GOP-BAU	8056326673598	TWT500GOP-BUS	8056326673482
TWT250GOP-BUK	8056326673673	TWT400SPP-BEU	8056326673703	TWT400GOP-BCH	8056326673567	TWT500GOP-BAU	8056326673499
TWT250GOP-BUS	8056326673680	TWT400SPP-BUK	8056326673727	TWT500STP-BEU	8056326673345	TWT500GOP-BCH	8056326673468
TWT250GOP-BAU	8056326673697	TWT400SPP-BUS	8056326673734	TWT500STP-BUK	8056326673369		

Pre-lit Wreath

DETAILS

LED profiles	
Cable colors	
Connectivity	 
No. of lamps	50
Diameter	61 cm 24 in
Power rating	24W MAX

Product SKU	EAN code
TWR050SPP-BEU	8056326673758
TWR050SPP-BUK	8056326673772
TWR050SPP-BUS	8056326673789
TWR050SPP-BAU	8056326673796
TWR050SPP-BCH	8056326673765




Pre-lit Garland

DETAILS

LED profiles	
Cable colors	
Connectivity	 
No. of lamps	50
Length	2.7 m 9 ft
Power rating	24W MAX

Product SKU	EAN code
TWG050SPP-BEU	8056326673802
TWG050SPP-BUK	8056326673826
TWG050SPP-BUS	8056326673833
TWG050SPP-BAU	8056326673840
TWG050SPP-BCH	8056326673819

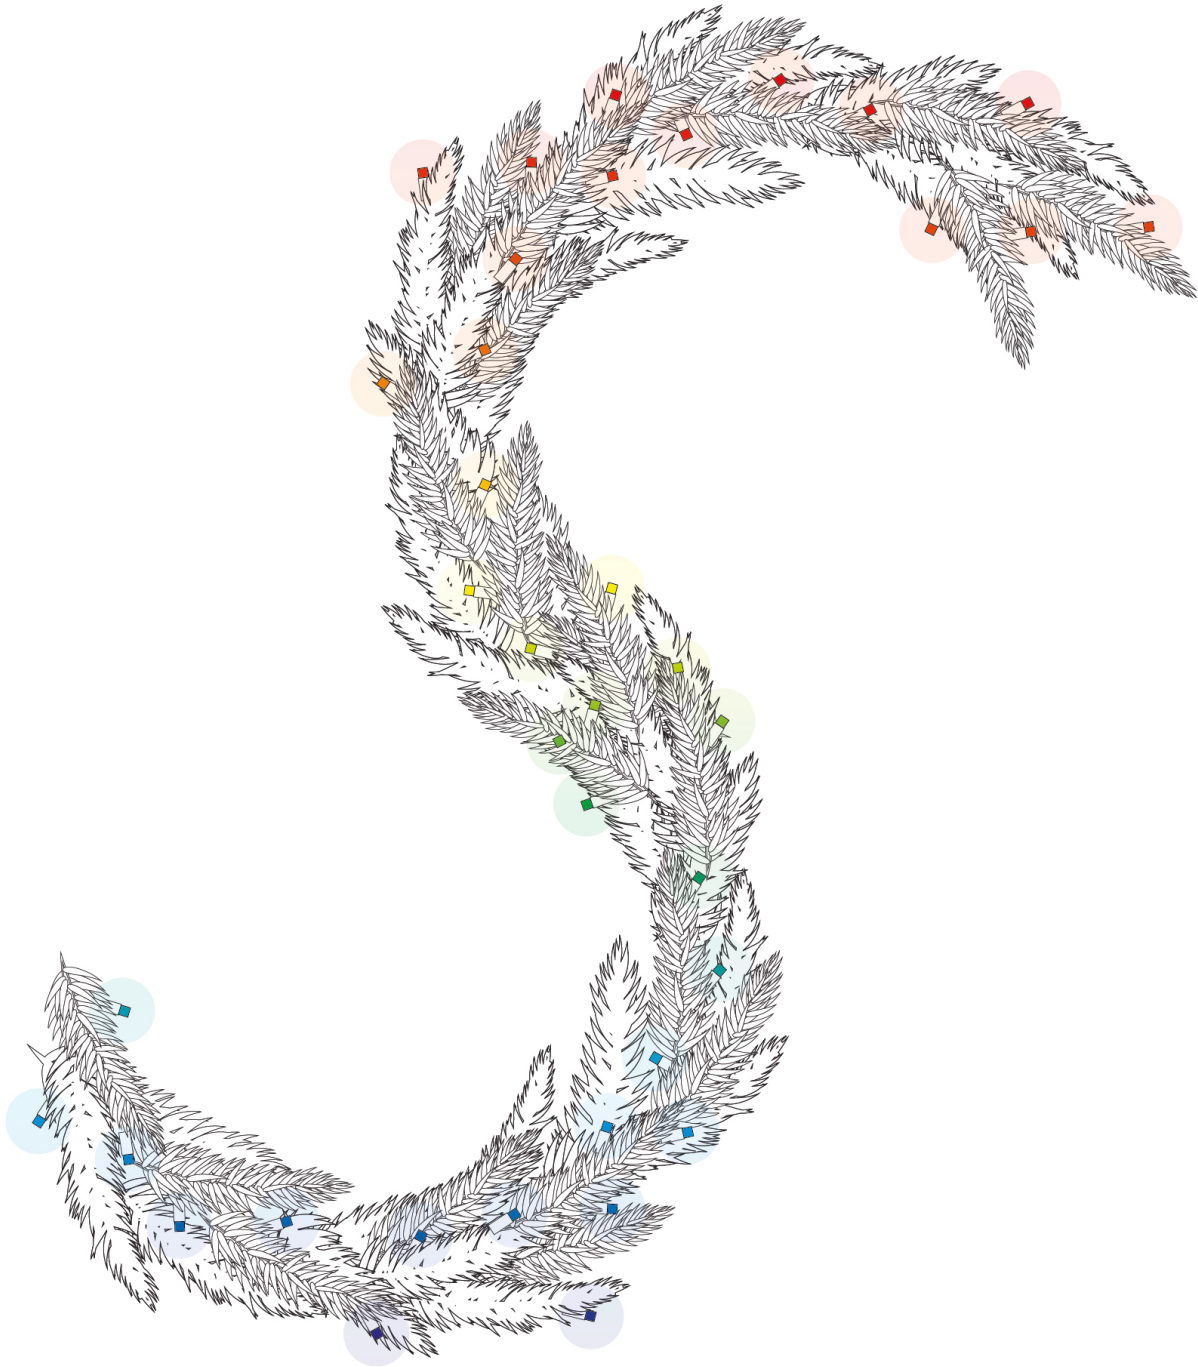


TWINKLY



Light Tree

PRODUCT RANGE

No. of lamps	LED profiles	Cable color	Height	Diameter	Power rating
300			2 m 6.6 ft	1 m 3.3 ft	36W MAX
500			3 m 10 ft	1.5 m 5 ft	36W MAX
750			4 m 13.2 ft	2 m 6.6 ft	36W MAX
1000 *			6 m 20 ft	3 m 10 ft	60W MAX

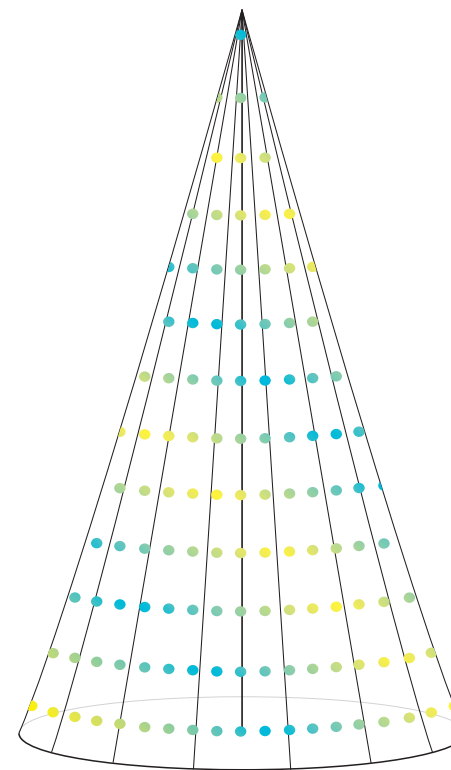


Product SKU	EAN code	Product SKU	EAN code	Product SKU	EAN code	Product SKU	EAN code
TWP300SPP-BEU	8056326677022	TWP500SPP-BEU	8056326677183	TWP750SPP-BEU	8056326676889	TWP01KSPP-BEU	8056326676933
TWP300SPP-BUK	8056326677046	TWP500SPP-BUK	8056326677206	TWP750SPP-BUK	8056326676902	TWP01KSPP-BUK	8056326676957
TWP300SPP-BUS	8056326677053	TWP500SPP-BUS	8056326677213	TWP750SPP-BUS	8056326676919	TWP01KSPP-BUS	8056326676964
TWP300SPP-BAU	8056326677060	TWP500SPP-BAU	8056326677220	TWP750SPP-BAU	8056326676926	TWP01KSPP-BAU	8056326676971
TWP300SPP-BCH	8056326677039	TWP500SPP-BCH	8056326677190	TWP750SPP-BCH	8056326676896	TWP01KSPP-BCH	8056326676940

Product SKU	EAN code
TWP-01K-POLE-A	8056326676995
TWP-01K-POLE-B	8056326676988

* 6 m | 20 ft pole sold separately

Line




DETAILS

LED profiles	
Cable colors	
Connectivity	
No. of bulbs	100
Lead length	2 m 6.5 ft
Lighted length	1.5 m 5 ft
Power rating	24W MAX

Product SKU	EAN code
TWL100STW-BEU	8056326677077
TWL100STW-BUK	8056326677091
TWL100STW-BUS	8056326677107
TWL100STW-BAU	8056326677114
TWL100STW-BCH	8056326677084
TWL100ADP-B	8056326677121

Flex




DETAILS


LED profiles	
Cable colors	
Connectivity	 
No. of bulbs	200
Lead length	2 m 6.5 ft
Lighted length	2 m 6.5 ft
Power rating	24W MAX

Product SKU	EAN code
TWFL200STW-WEU	8056326677138
TWFL200STW-WUK	8056326677152
TWFL200STW-WUS	8056326677169
TWFL200STW-WAU	8056326677176
TWFL200STW-WCH	8056326677145

TWINKLY



Square

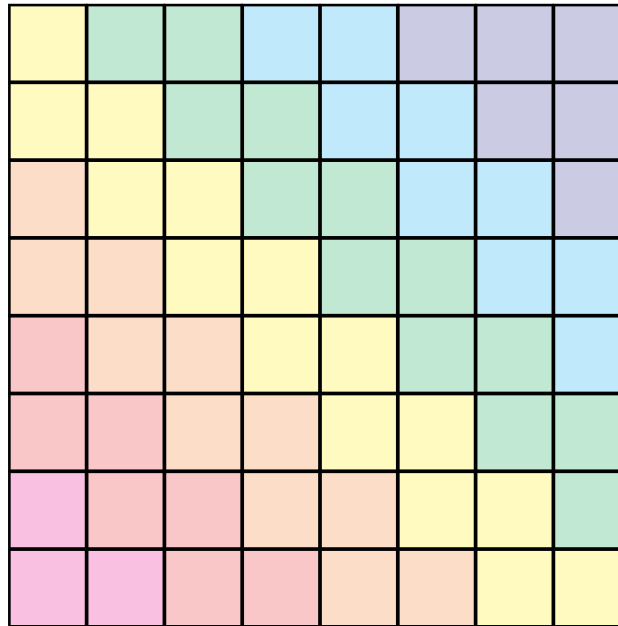

COMING SOON

Contact

For more information please contact us
at marser@my-lighting.com or visit www.my-lighting.com

Showroom Address :

경기도 하남시 하남대로 947 하남테크노밸리 U1 센터 D동 1308호
TEL: 02-2205-1125